




LE-910 EBS

- Location (GPS, GLONASS)
- EBS system connector with ignition and power voltage detection
- Easy installation – magnetic mounting, plug-and-play, non-invasive connection
- Weather-resistant – IP68
- BLE Interface – capability to connect Beacon sensors

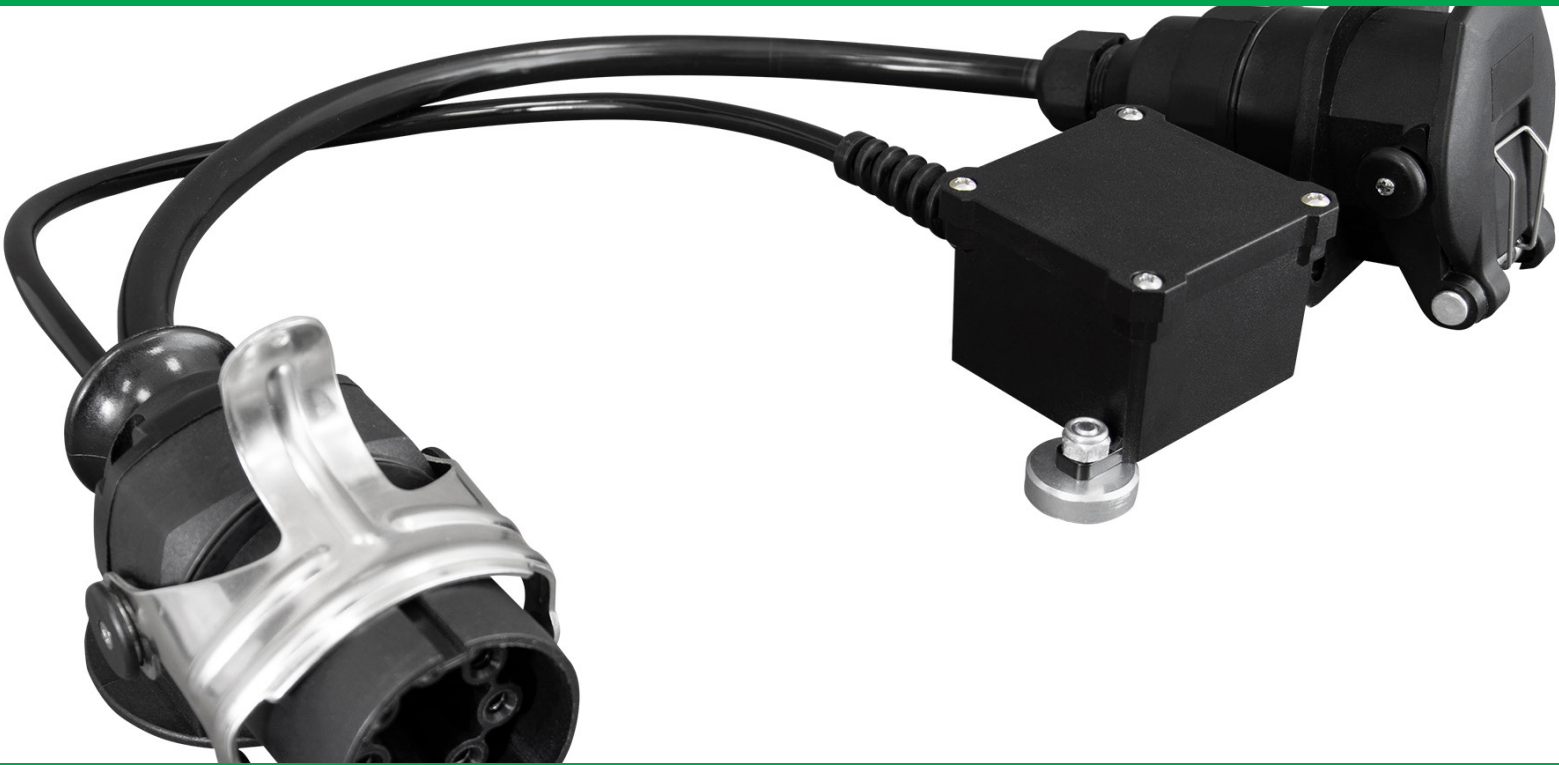

Standard equipment:



Options:



Technical specifications LE-910 EBS

Technology:	GSM, GPRS, LTE (4G), GNSS (GPS, GLONASS), BLE (Beacon)
Power supply:	+12V / +24V
Current consumption (min.):	15 mA
Current consumption (max.):	800 mA
Current consumption (avg.):	40 mA
Operating temperature range:	-30°C to +50°C
GSM antenna:	Built-in
GNSS antenna:	Built-in
Dimensions (W × L × H):	65 × 65 × 45 mm
Enclosure protection class:	IP68
SIM Card Type:	Nano (4FF)
Built-in Event and Location Data Memory:	30,000 records
Built-in Accelerometer:	Motion detection
Programming Connector:	Internal Micro USB (manufacturer's converter required)
Battery:	Built-in 3.7V, 4080 mAh
Inputs:	Power with voltage measurement, ignition input
Interfaces:	Beacon (BLE)
Control Output:	–

